




IP65 Trimmed LED Spotlight Installation Manual

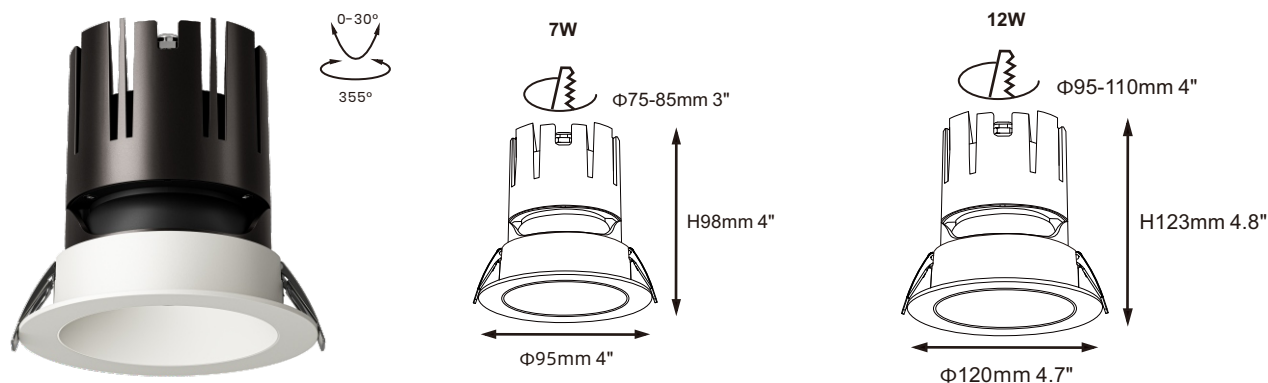

Description

This 3" and 4" round recessed IP65 trimmed spotlight features a high-quality die-cast aluminum housing, a branded LED chip and a reliable driver, offering a lifespan of up to 50,000 hours. It incorporates an anti-glare design with UGR <19, is Type IC-rated and suitable for damp locations. The product is widely used in high-end custom residential homes, hotels, hospitality venues, shopping malls and other commercial applications.



Key Features:

Model Number:	LP-SP04-IP-C7-02 / LP-SP04-IP-C12-02
Power:	7W / 12W
Size:	Φ95xH98mm 4"x4" / Φ120xH123mm 4.7"x4.8"
Cut out:	Φ75-85mm 3" / Φ95-110mm 4"
Light Source:	CREE COB Chip
LED Driver:	UL Listed; 50000 Lifespan
Input Voltage(V):	AC120~277V 50/60Hz
Color Temperature:	2700K /3000K /3500K/ 4000K/ 5000K
CRI:	CRI>90
Dimming:	Triac / ELV/ Phase Cut Dimming
Beam angle:	36°
Light Efficiency:	70~80 lm/w
Tilt & Rotate:	Gear - driven tilt 0°to 30°and 355°lockable rotation.
Construction:	Type IC-rated, no housing required. High quality die-cast aluminum housing with powder-coating finishing. Junction box included with products.
Listing:	ETL, cETL, FCC
Operating temperature:	-4°Fto104°F(-20°C to 40°C)
Warranty:	5 years limited

Round Trimless LED Spotlight Installation Manual

Different color of reflectors



Matt white




Matt black




Gun black

Installation Manuals


Step1: Cut round ceiling hole in accordance with cut-hole dimensions in desired location.




Step2: Connect all the wires on the junction box, and then Connect the LED driver with the luminaire housing.

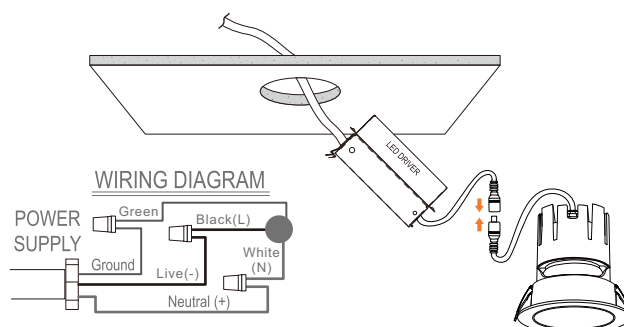

Step3: Insert junction box through the ceiling opening.

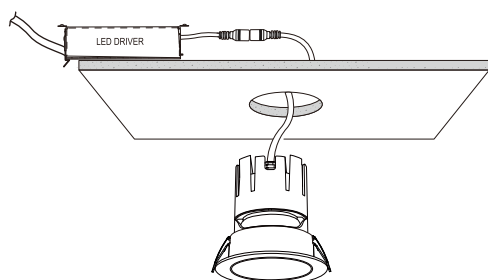


Step4: Lift the spring-loaded clips until they are in a vertical position. Insert luminaire housing in the cutout hole until the trim presses firmly against the ceiling surface.

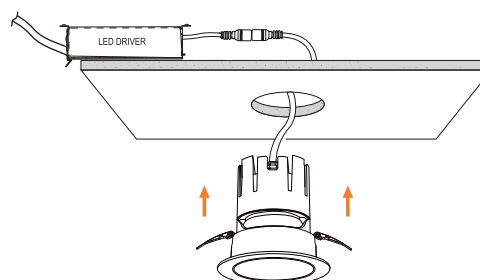


Round Trimless LED Spotlight Installation Manual

Step5: Installation completed. Turn on the light to test the light.

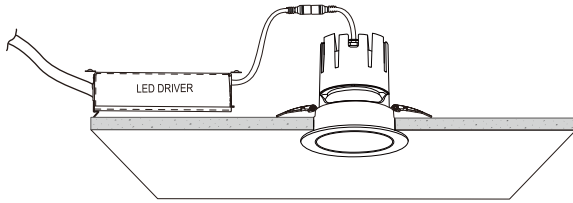

Tools & Preparation



Caution!

- 1、 Read and understand manuals completely before installing this luminaire.
- 2、 Luminaire must be installed by a qualified licensed electrician.
- 3、 Before starting the wire connections, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse panel. Turning the power off using the light switch is not sufficient to prevent electrical shock.